


AIMB-787

LGA1200 10th Generation Intel® Core™ i9/i7/i5/i3 & Pentium®/Celeron® ATX with DP/DVI/VGA, DDR4, USB 3.2, M.2

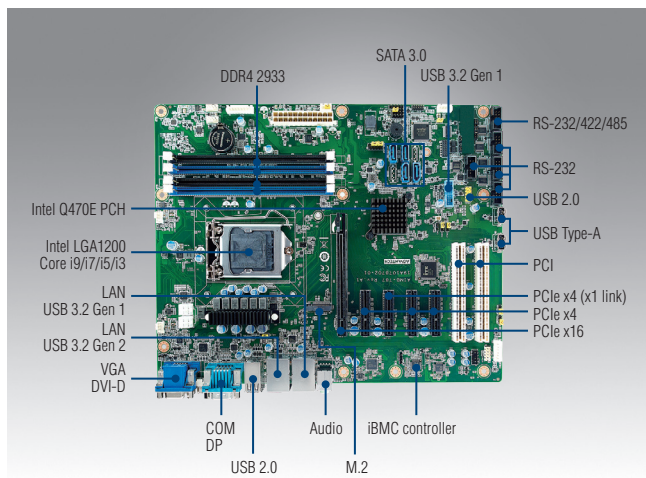

Features

- Intel® 10th generation Core™ i9/i7/i5/i3 & Pentium®/Celeron® processor with Q470E chipset
- Four DIMM sockets up to 128 GB DDR4 2933
- Triple display DP/DVI-D/VGA and dual GbE LAN
- M.2, SATA RAID 0, 1, 5, 10, USB 3.2
- Supports Intel vPro, AMT & TPM technologies
- Advantech iBMC 1.2 remote out-of-band power management solution on DeviceOn

Note 1: dTPM 2.0 module is required to enable Intel vPro and TPM technologies.

Note 2: Legacy platform is not supported.

Note 3: Intel® Platform Trust Technology (Intel® PTT) ready for Windows 11.

Quiet Specifications


CE FCC

Processor System	CPU	i9-10900E	i9-10900TE	i7-10700E	i7-10700TE	i5-10500E	i5-10500TE	i3-10100E	i3-10100TE	G6400E	G6400TE	G5900E	G5900TE			
	Base Frequency	2.8 GHz	1.8 GHz	2.9 GHz	2.0 GHz	3.1 GHz	2.3 GHz	3.2 GHz	2.3 GHz	3.8 GHz	3.2 GHz	3.2 GHz	3.0 GHz			
	L3 Cache	20 MB	20 MB	16 MB	16 MB	12 MB	12 MB	6 MB	6 MB	4 MB	4 MB	2 MB	2 MB			
	Cores	10	10	8	8	6	6	4	4	2	2	2	2			
	TDP	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W			
	Socket	LGA1200														
	Chipset	Q470E														
Expansion Slot	BIOS	AMI 256 Mbit SPI														
	PCI	2 (32-bit/33 MHz)														
	PCIe x4 (Gen 3)	4 (3 x link x4, 1 x link x1)														
Memory	PCIe x16 (Gen 3)	1														
	Technology	Dual Channel (Non-ECC) DDR4 2933														
	Max. Capacity	128 GB														
Graphics	Socket	4 x 288-pin DIMM														
	Controller	Intel® UHD Graphics 610														
Ethernet	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed														
	Interface	10/100/1000 Mbps														
	Controller	GbE LAN1: Intel I219-LM, GbE LAN2: Intel I210-AT (iBMC supported)														
SATA	Connector	2 x RJ-45														
	Max Data Transfer Rate	600 MB/s														
	Channel	4														
Rear I/O	RAID	0,1,5,10														
	VGA	1 (Resolution up to 1920 x 1200 @ 60 Hz)														
	DVI-D	1 (Resolution up to 1920 x 1200 @ 60 Hz)														
	DisplayPort	1 (Resolution up to 4096 x 2304 @ 60 Hz)														
	Ethernet	2														
	USB	8 (2 x USB 3.2 Gen 2, 2 x USB 3.2 Gen 1, 4 x USB 2.0)														
	Audio	2 (Line-out, Mic-in)														
Internal Connectors	Serial	1 (RS-232)														
	USB	6 (2 x USB 3.2 Gen 1 via header, 2 x USB 2.0 via header, 2 x USB 2.0 Type-A connector)														
	Serial	5 (4 x RS-232, 1 x RS-232/422/485)														
	SATA	4														
	M.2	1 (PCIe x4 M-key 2280 type)														
	LPC	1 (Optional dTPM 2.0 module available)														
	GPIO	8-bit														
Watchdog Timer	PS/2 KB/Mouse	1 (Optional PS/2 KB/Mouse Cable is required)														
	Output	System reset														
Power Requirement*	Interval	Programmable 1 ~ 255 sec														
	Power On	Intel Core i5-10500E; DDR4 32 GB x 4														
	Voltage	+12V			+5V			+3.3V			+5Vsb			-12V		
Environment	Current	0.59A			1.92A			0.87A			0.14A			0.08A		
	Operating	0 ~ 60 °C (32 ~ 140 °F), depends on CPU speed and system thermal solution									Non-Operating					
	Temperature	-40 ~ 85 °C (-40 ~ 185 °F)														
Physical Characteristics	Humidity	40 °C @ 95% RH Non-condensing									60 °C @ 95% RH Non-condensing					
	Dimensions (L x H)	304.8 x 244 mm (12" x 9.6")														

Note: A 8-pin 12V CPU power plug connected to MB's CPU 12V connector is required to support i9-10900K CPU. Core i9-10900K has no long life time due to not belong to embedded segment.

* CPU power requirement, +V12_8P, is not included.

Block Diagram

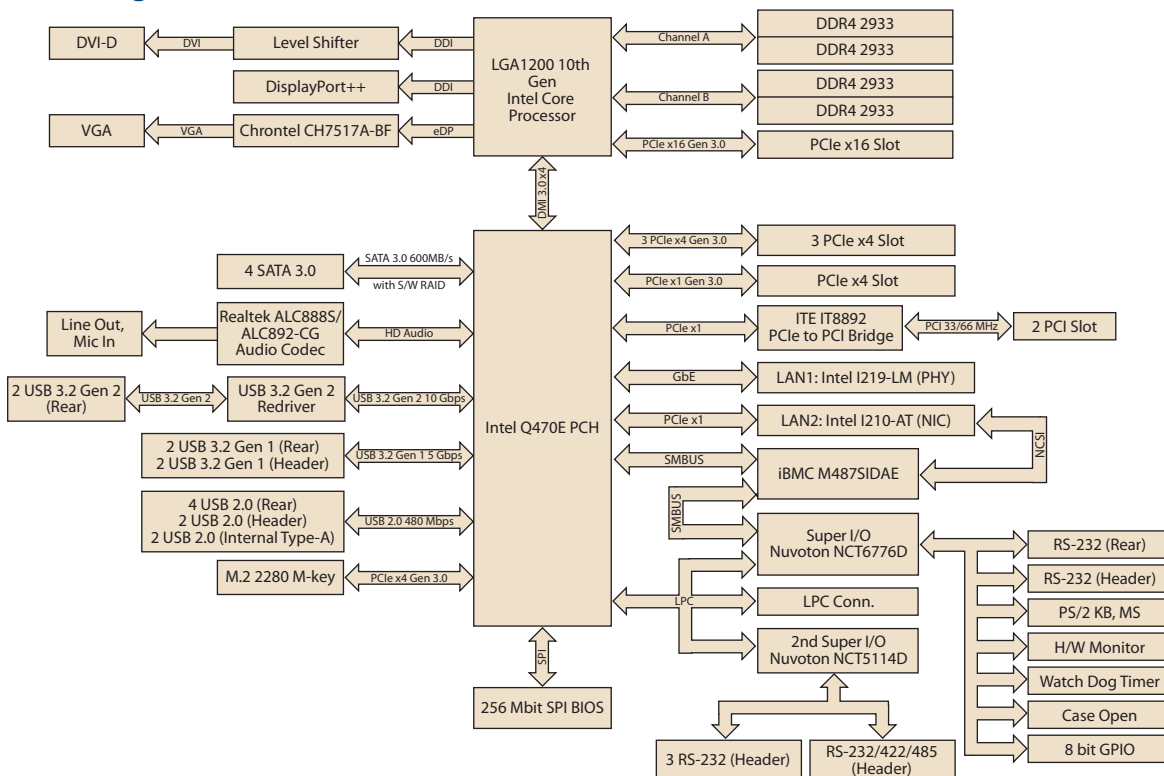

Ordering Information

Part Number	Chipset	Memory	Display	USB 3.2 Gen 2	USB 3.2 Gen 1	USB 2.0	COM	GbE LAN	AMT	M.2	SATA 3.0	SW RAID
AIMB-787G2-00A4	Q470E	Non-ECC DDR4 2933 up to 128 GB	VGA + DVI-D + DP	2	4	8	6	2	Yes	1	4	Yes
AIMB-787G2-00A41	Q470F	Non-ECC DDR4 2933 up to 128 GB	VGA + DVI-D + DP	2	4	8	6	2	Yes	1	4	Yes

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	x 2
1960086615T001	I/O port bracket	x 1
2041078710	Startup manual	x 1

Note: Driver CD is not provided. Please visit Advantech support website for driver download.

I/O View



AIMB-787G2-00A4
AIMB-787G2-00A4U

Optional Accessories

Part Number	Description
1700002204	2-port USB 2.0 cable w/ BKT(27 cm)
1700028292-01	2-port USB 3.0 cable w/ BKT(30 cm)
1960052651N021	CPU cooler for 2U, 4U and wallmount chassis (for CPU TDP=35~65W)
1960067860N001	CPU cooler for 4U chassis (for CPU TDP=95~125W)
1960047669N001	CPU cooler for 4U chassis (for CPU TDP=65~125W)
1701090401	Single COM port cable(40 cm)
1701092300	Dual COM port cable(28.5 cm)
1700022749-11/ 1700022749-12/ 1700022749-13	SATA power cable
1700019268-11	PS/2 KB/Mouse cable
1960063434N000	IO bracket for PS/2 KB/Mouse cable
PCA-TPM-00B1E	dTPM 2.0 I/O PC module to enable TPM and vPro technologies

Note 1: Purchasing AIMB-787's proprietary CPU cooler from Advantech is a must. Other brands' CPU coolers are NOT compatible with AIMB-787.

Note 2: 1960067860N001 cooler for 95~125W CPU is tested with ACP-4000/IPC-610H chassis.

Riser Card

Part Number	Description
AIMB-R430P-03A2E	2U riser card with 3 PCI expansion
AIMB-R431F-21A1E	2U riser card with 1 PClex16 & 1 PClex1 expansion
AIMB-R43PF-21A1E	2U riser card with 1 PClex16 & 2 PCI expansion
AIMB-R4301-03A2E	2U riser card with 1 PClex1 expansion

Note: AIMB-787 is not compatible with 1U chassis.

Last updated: 7-Jan-2025