

W27IAD7T-POA1

27" Intel® Core™ Alder Lake LGA 1700 PO Series HMI Panel PC



KEY FEATURES

- 12th Gen Intel® Core™ Alder Lake S Socket LGA 1700 i9 / i7/ i5 / i3 processor
- 1920 x 1080 resolution
- Projected capacitive multi-touch screen
- Multi display supports HDMI / LVDS / eDP panel interface
- Multiple I/Os, 2 x Serial Ports, 4 x USB 3.2 Gen2x1 Ports
- Front IP65 water and dust proof
- 12V single voltage power input

INTRODUCTION


Winmate PO Series HMI offers a versatile solution for industrial automation and kiosk applications, with sizes ranging from 7" to 27". Featuring Intel® processors, a slim-line open-frame design, and a flat multi-touch PCAP display, it delivers sleek aesthetics and advanced functionality. With certifications for rugged environments and options like dual Gigabit Ethernet and IP65-rated front protection, this HMI is ideal for interactive kiosks, process control, and smart manufacturing, ensuring reliable performance and seamless integration.

SPECIFICATIONS

Display			
Resolution	1920x1080	Size	27.0 inches
Contrast Ratio	3000:1	Panel Brightness	300.0 nits
View Angles	89,89,89,89	Active Area	597.6x336.15 mm
Touch / Glass	Projected Capacitive Multi Touch Screen		
System Specification			
WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel® Core™ i3-12100TE(up to 4.00GHz) Intel® Core™ i5-12500TE(up to 4.3GHz) (Optional) Intel® Core™ i7-12700TE(up to 4.6GHz) (Optional) Intel® Core™ i9-12900TE(up to 4.80GHz) (Optional) Intel® Core™ i3-14100T(up to 4.4GHz) (Optional) Intel® Core™ i5-14500T(up to 4.8GHz) (Optional) Intel® Core™ i7-14700T(up to 5.2GHz) (Optional) Intel® Core™ i9-14900T(up to 5.5GHz) (Optional)	Chipset	Intel® R680E
Memory	2 x SO-DIMM, DDR5 4800 MHz, 8GB 16GB (Optional) 32GB (Optional) 64GB (Optional)	Storage	1 x M.2 2280 M-Key NVMe SSD 256GB 512GB (Optional) 1TB (Optional) 2TB (Optional) 2 x SATA III for 2.5" SSD/HDD (Optional)
Ethernet controller	2 x Intel® Ethernet Controller	Security	TPM 2.0
Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Linux Ubuntu 22.04(Do not support Wake on Touch) (Optional)		
Mechanical			

Dimension	685.4 x 423.4 x 84.2 mm	Weight	11.3 kg
Mounting	VESA mount	Enclosure	Metal Housing
Cooling System	Fan Design		
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x 12V DC, Din4 pin connector	USB Port	4 x USB 3.2 Gen2x1 (10Gbps, TypeA)
Serial Port	1 x RS232/422/485 (Default RS232) 1 x RS232	Video	1 x DP1.4a DP++ , Max resolution up to 4096x2160@60Hz 1 x HDMI 2.0b , Max resolution up to 4096x2160@60Hz (Optional)
Audio	Mic in Line out	Expansion Port	1 x M.2 2280 M-Key Slot (for NVME SSD) 1 x M.2 2230 E-Key Slot (for Wi-Fi module)
LAN	2 x 2.5 Giga LAN RJ45 Connector		
Control			
Button	1 x Power Button 1 x Reset Button		
Accessory			
Accessory	100~240V AC to DC Adapter Power Cord VESA screws		
Power			
Power Rating	12V DC	Adapter	12V 220W

DIMENSIONS UNIT:MM

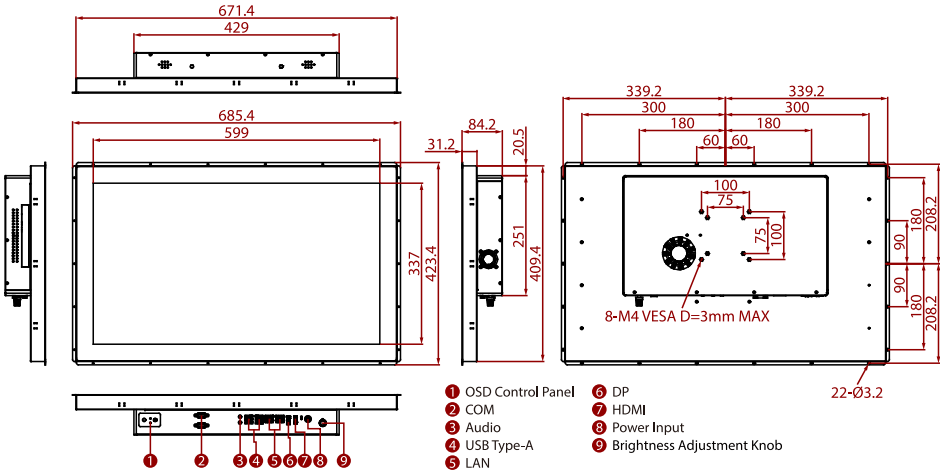

NOTE

- 1.This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.
- 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.