

R15L100-SPC369-P1

15" IP69K Stainless Display with Waterproof sealed conduit pipe



KEY FEATURES

- 15" 1024x768 resolution with PCAP touch
- Fanless cooling system, IP69K Stainless Display with Waterproof sealed conduit pipe
- SUS 316 / AISI 316 stainless steel for food and chemical industries
- Full IP69K waterproof enclosure
- A true flat, easy-to-clean front surface with edge-to-edge design
- Waterproof sealed conduit pipe for cable protection
- Supports VESA mount and Yoke mount stand
- Optical bonding (optional)

INTRODUCTION

Winmate IP69K Stainless P Series Display with Conduit Pipe is designed for the most demanding environments, such as food and chemical industries. Available in sizes from 15" to 24", it features a full IP69K waterproof enclosure with SUS 316/AISI 316 stainless steel for superior corrosion resistance. Its true flat, edge-to-edge design ensures easy cleaning, while the waterproof sealed conduit pipe provides enhanced cable protection. With PCAP touch options, fanless cooling, and versatile VESA or Yoke mount support, this display is ideal for hygiene-critical and harsh industrial applications.

SPECIFICATIONS

Display			
Resolution	1024x768	Size	15 inches
Contrast Ratio	2000:1	Panel Brightness	300 nits
Display Color	16.2M Colors	View Angles	88,88,88,88
Active Area	304.1x228.1 mm	Touch / Glass	Projected Capacitive Multi Touch Screen
Mechanical			
Dimension	378 x 301 x 56.2 mm	Mounting	VESA Mount Yoke Mount
Enclosure	Stainless Housing	Cooling System	Fanless design
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 45°C
Storage Temperature	-20°C to 60°C	IP rating	IP69K
Certification			
Certification	CE, FCC		
IO Ports			
USB Port	1x USB type-A for touch screen control	Video	1x VGA 1x HDMI (Optional)

Indicator1 x LED Indicator for power
1 x LED Indicator for status

Control

Button1 x Power Button
1 x Adjust up button
1 x Adjust down button
1 x ESC (Auto) button
1 x OK (Menu) button

Accessory

Accessory1 x Waterproof Conduit 1.5m
1 x Waterproof Conduit 0.3m
2 x Elbow for connect the conduit
1 x AC to DC power adapter with power cord
1 x External USB cable for touchscreen control
1 x External HDMI cable
1 x D-sub15(male) to RJ45 adapter
1 x D-sub15(female) to RJ45 adapter
1 x External RJ45 male to male cable
Manual
VESA screws


Optional Accessory

1 x Open wire cable for phoenix connector (Optional)
Yoke mount stand kit (Optional)

Power

Power Rating12V DC

DIMENSIONS UNIT:MM

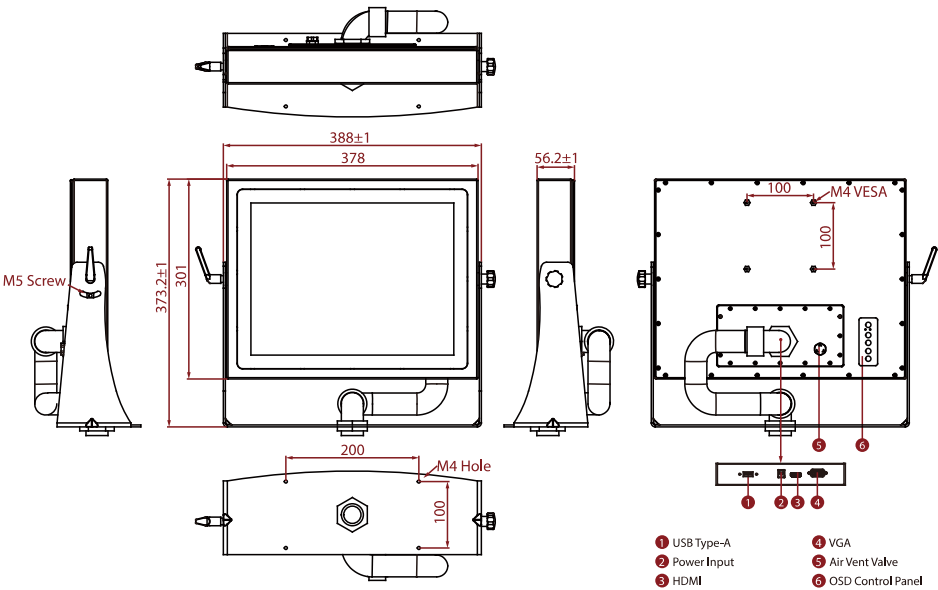

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.